


NOTE:
 -MAX. ALLOWABLE TAPER FOR ENTIRE
 LENGTH OF WHEEL BORE:
 FORWARD TAPER- 0.015
 REVERSE TAPER- 0.003
 -DIMENSIONS ARE IN INCHES


MACHINE THESE AREAS IF RUNOUT
 TO TREAD EXCEEDS .06 T.I.R ON
 EITHER SIDE OF WHEEL AS
 MEASURED ON OUTER EDGE OF RIM
 FILLET




VIEW C

NOTE:
 RE-STAMP HUB DATA IF REQUIRED


REV.No	DATE	REVISION	APPD

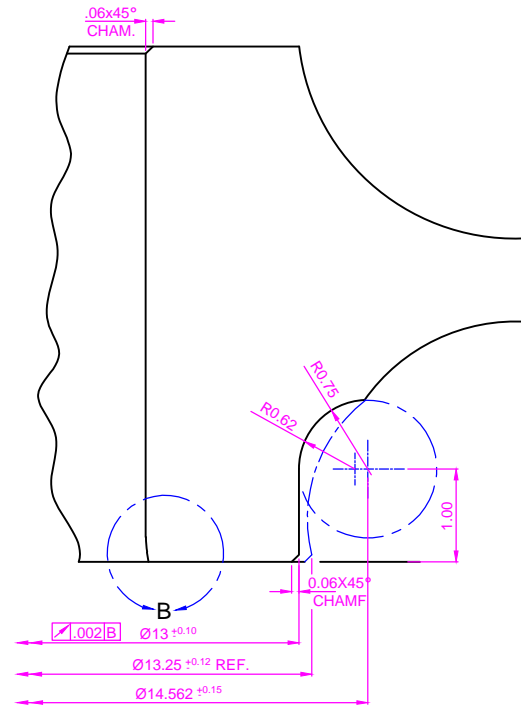

VIEW A
 ENLARGED



VIEW B
 ENLARGED



VIEW B
 (OPTIONAL)

6		WHEEL			AAR-M107 CLASS B LATEST YEAR OF ISSUE	GM 10596190	450	
No. OFF		DESCRIPTION & DIMENSIONS			ITEM	MATL & SPEC'N	REF DRAWING	WEIGHT (Kg)
PER BOGIE		DRN	M. MULINDA		WHEEL DISC - 40" (GT 36 LOCOMOTIVE)			
		TRD						
		CHD						
		CMD						
		APPROVED		SCALE	ASSEMBLY	REPLACES DRG. No.		
Manager MP				REPLACED BY				
DIESEL LOCOMOTIVE		ZAMBIA RAILWAYS LIMITED			W-D-A4-03-47-97			
		ZRL ROLLING STOCK DEPT MAIN WORKSHOPS KABWE						
		REV.						